

**AU Line  
Benefit-Line Refrigerated Counter  
2 Doors (with splashback)**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**AU Line**

**Benefit-Line Refrigerated Counter 2  
Doors (with splashback)**

726182 (RCSN2M2U)

2 door refrigerated table with  
upstand, -2+10 °C

**Short Form Specification**

**Item No.** \_\_\_\_\_

Two full doors refrigerator with internal and external structure in 304 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. Door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; automatic defrost and evaporation of defrost water. Operating temperature: 0/+6 °C. For ambient temperatures up to 43 °C. CFC and HCFC free. R134a gas in refrigeration circuit.

Supplied with n. 6x2/1GN Rilsan coated grids and n. 6 sets of 2 stainless steel grid runners. Mounted on wheels and equipped with UK plug. Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

**Main Features**

- Complies with main international certification bodies and is CE marked.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.
- Tropicalized unit (43°C ambient temperature).
- This appliance is intended for use in ambient temperatures up to 40°C.

**Construction**

- External back panel in galvanized steel.
- Refrigerant type: R404a.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Insulation guaranteed by high density expanded cyclopentane 50 mm in thickness.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.
- Built-in compressor to suit operating conditions.
- CFC and HCFC free.


**Included Accessories**

- 2 of 1/1 GN grey "rilsan" grid PNC 881435

**Optional Accessories**

- 2 half drawer kit PNC 880023
- Lock kit PNC 880024
- 4 wheels (2 with brake) PNC 880025
- Kit for door reversibility PNC 880046
- Internal structure to support 3 grids (right & left) PNC 880047
- Kit of 2 304 AISI stainless steel 1/1 GN grids for refrigerated table PNC 880139
- Stainless steel internal structure to support 6 grids (right & left) PNC 880140
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- Kit 4 feet for Benefit and Concept refrigerated counters PNC 880334
- Kit reversible door for standard benefit counters PNC 880341
- 1/1 GN plastic container h. 65 mm PNC 881038
- 1/1 GN plastic container h. 150 mm PNC 881040
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457

APPROVAL: \_\_\_\_\_

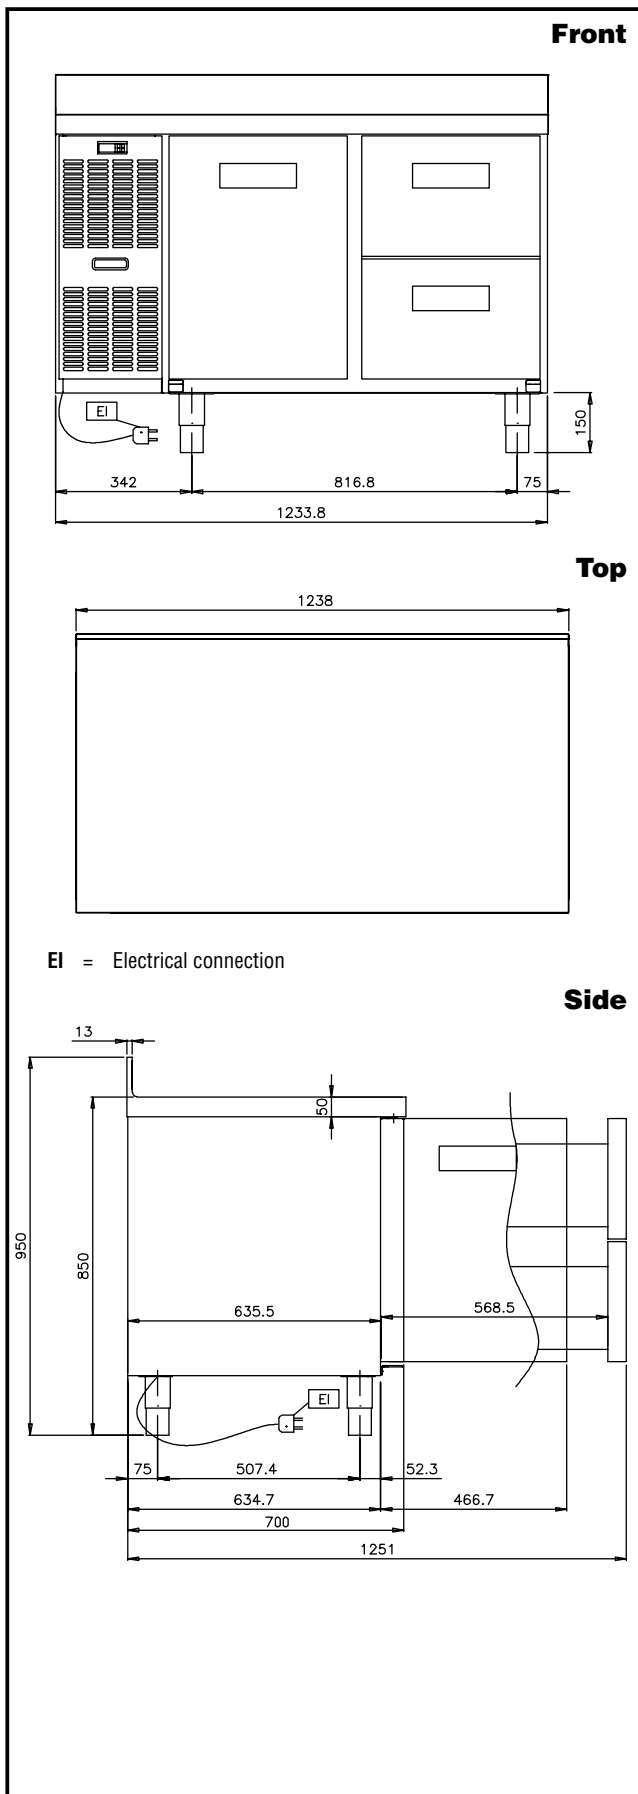

**Electric**

Supply voltage:  
726182 (RCSN2M2U) 230 V/1N ph/50 Hz  
Electrical power: 0.267 kW

**Key Information:**

Gross capacity: 265 lt  
Net Volume: 165 lt  
Door hinges: 1 Left+1 Right  
External dimensions, Height: 950 mm  
External dimensions, Width: 1238 mm  
External dimensions, Depth with Doors Open: 1102 mm  
Net weight: 120 kg  
Noise level: 58,5 dBA  
Number and type of grids (included): 2 - GN 1/1  
Worktop type: Stainless Steel with Splashback  
Built-in Compressor and Refrigeration Unit

**Refrigeration Data**

Compressor power: 1/3 hp  
Refrigerant type: R404a  
Refrigeration power: 448 W  
Refrigeration power at evaporation temperature: -10 °C  
Refrigerant weight: 130 g  
Min/Max internal humidity: 55/  
Operating temperature min.: -2 °C  
Operating temperature max.: 10 °C  
Operating mode: Ventilated  
N° defrost in 24 hrs: every 6 hrs

**Product Information (EU Regulation 2015/1094)**

Energy Class: C  
Yearly energy consumption: 803kWh/year  
Climate class: Heavy Duty (5)  
Energy Efficiency Index (EEI): 36,30