

AU Line Benefit-Line Refrigerated Counter 4 Doors with splashback - AISI 304

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



AU Line

Benefit-Line Refrigerated Counter 4 Doors with splashback - AISI 304

726197 (RCSN4M4U)

4 door refrigerated table with
upstand, -2/+10 °C

Short Form Specification

Item No.

External in white prepainted steel. Internal in white thermoformed polystyrene which is impact resistant with rounded corners. Insulation thickness mm45. Grid runners are thermoformed and incorporated in the inner structure. Right hinged glass door with lock and heated frame. Static operating mode; mechanical control; evaporating grids; automatic defrost with waste water device; internal lighting. For ambient temperatures up to 32 °C. CFC and HCFC free. R404a gas in refrigeration circuit. Gas in foam: Cyclopentane. Supplied with evaporating grids.

Main Features

- Complies with main international certification bodies and is CE marked.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Possibility to install on socket.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.
- Tropicalized unit (43°C ambient temperature).
- This appliance is intended for use in ambient temperatures up to 40°C.

Construction

- Refrigerant type: R404a.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Insulation guaranteed by high density expanded cyclopentane 50 mm in thickness.
- Back panel in galvanized steel.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.
- Built-in compressor to suit operating conditions.
- CFC and HCFC free.

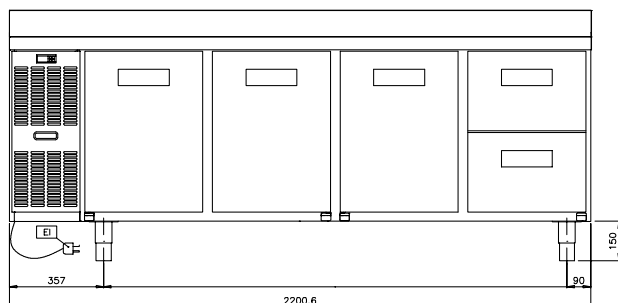
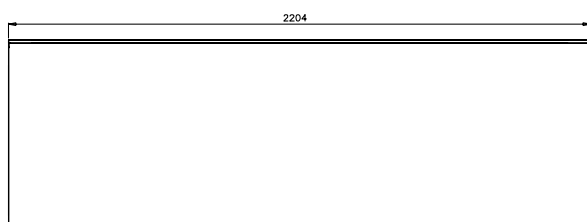
Included Accessories

- 4 of 1/1 GN grey "rilsan" grid PNC 881435

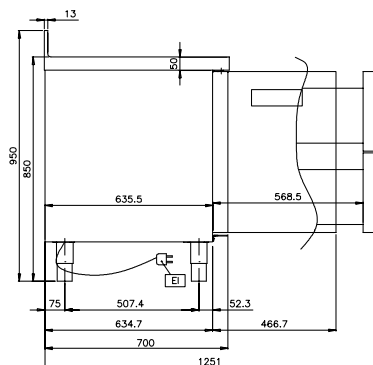
Optional Accessories

- 2 half drawer kit PNC 880023 ☐
- Lock kit PNC 880024 ☐
- Kit for door reversibility PNC 880046 ☐
- Internal structure to support 3 grids (right & left) PNC 880047 ☐
- Kit of 2 304 AISI stainless steel 1/1 GN grids for refrigerated table PNC 880139 ☐
- Stainless steel internal structure to support 6 grids (right & left) PNC 880140 ☐
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252 ☐
- Kit reversible door for standard benefit counters PNC 880341 ☐
- Kit 3 wheels (2 with brake) and 4x40mm spacers for refrigerated counters PNC 880530 ☐
- 1/1 GN plastic container h. 65 mm PNC 881038 ☐
- 1/1 GN plastic container h. 150 mm PNC 881040 ☐
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457 ☐

APPROVAL: _____

Front

Top


EI = Electrical connection

Side

Electric

Supply voltage:

726197 (RCSN4M4U)

230 V/1N ph/50 Hz

Electrical power:

0.267 kW

Key Information:

Gross capacity:

560 lt

Net Volume:

330 lt

N° of doors:

4

Door hinges:

2 Left+2 Right

External dimensions, Height:

950 mm

External dimensions, Width:

2204 mm

 External dimensions, Depth with
Doors Open:

1102 mm

Internal Dimensions (depth):

580 mm

Internal Dimensions (height):

543 mm

Internal Dimensions (width):

365 mm

Net weight:

187 kg

Noise level:

58,5 dBA

 Number and type of grids
(included):

4 - GN 1/1

Worktop type:

Stainless Steel with Splashback

Built-in Compressor and Refrigeration Unit

Refrigeration Data

Control type:

Digital

Compressor power:

1/3 hp

Refrigerant type:

R404a

Refrigeration power:

448 W

 Refrigeration power at
evaporation temperature:

-10 °C

Refrigerant weight:

210 g

Min/Max internal humidity:

57/

Operating temperature min.:

-2 °C

Operating temperature max.:

10 °C

Operating mode:

Ventilated

N° defrost in 24 hrs:

every 6 hrs

Product Information (EU Regulation 2015/1094)

Energy Class:

C

Yearly energy consumption:

1250kWh/year

Climate class:

Heavy Duty (5)

Energy Efficiency Index (EEI):

47,47