



GENERAL DETAILS

- Rack dimensions: 50 x 50 cm
- Net weight : 112 Kg
- No.3 washing cycles: 60/120/180 sec.
- Possibility of automatic start of washing cycle by closing the hood
- Upper and lower rotating wash/rinse arms in stainless steel with independent rinse arms
- Wash pump: 880 W
- Boiler capacity: 8 lt
- Tank capacity: 30 lt
- Boiler heating elements: 6 kW
- Tank heating elements: 4.5 kW
- Water quantity per cycle: 3 lt
- Soft-touch control panel
- Standard digital tank and boiler thermometers
- Useful washing height: 420 mm
- Magnetic hood microswitch
- Automatic filling of water
- Rinse-Aid dispenser included
- Hot rinse
- Thermostop-controlled rinse operating temperature
- Anti-Backflow system on the hydraulic circuit included

WATER FILTRATION

- Pre-filtering of tank water by means of no. 1 stainless steel filters
- Single wash pump filter in stainless steel , easily removable

BODY

- AISI 304 stainless steel body
- Deep drawn tank with rounded edges
- Single skin hood
- Hood opening system with springs
- Removable upper and lower wash/rinse arms for easy cleaning
- Boiler in AISI 304 stainless steel
- Stainless steel overflow pipe

EQUIPMENT

- 2 racks 50 x 50 cm, 12/18 plates
- 1 glass rack 50 x 50 cm
- 2 cutlery baskets
- 1 inlet hose (1.5 mt length)
- 1 drain hose (2 mt length)

OPTIONAL

- Drain pump
- Booster pump
- Adjustable electric detergent dispenser
- Atmospheric boiler

ACCESSORIES FOR WATER TREATMENT

- Water softener unit

ACCESSORIES

- Stainless steel pre-wash tables/exit tables
- Special racks

SPECIFICATIONS OF THE RANGE

- Sturdy, pass-through / corner installation, versatile and elegant, Aristarco hood dishwashers offer the best in terms of washing performance and long-lasting quality.
- This line comprises 7 models ranging from the basic models with electromechanical controls to advanced models with electronic controls.
- The Aristarco hood dishwasher range can be equipped upon request with dishwasher tabling (both inlet and outlet) to create a small conveyor system for more efficient washing, ideal for medium-sized catering businesses.

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY


- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multipole wall switch provided

WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 45°C

TECHNICAL SPECIFICATIONS

- Voltage: 400 V3N/50 Hz
- Total power : 9.88 kW
- Amperage: 20 A
- Power cord supply : 5 x 2.5 mmq

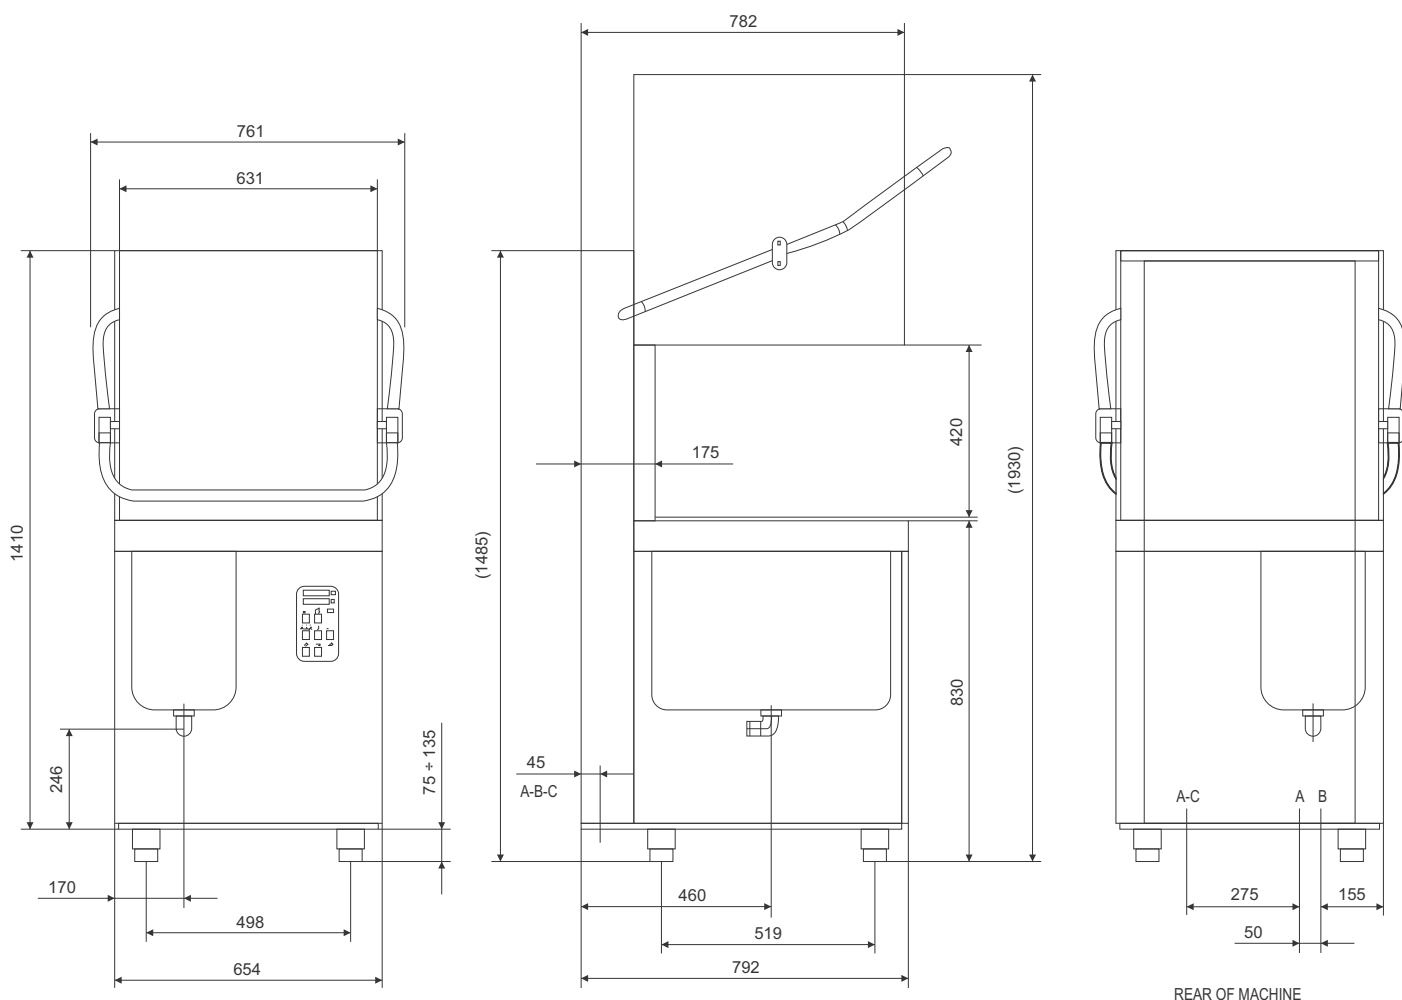

A: EXIT POWER CORD SUPPLY

B: EXIT WATER OUTLET PIPE INT. Ø 18 mm. L=mm.2000

C: WATER INLET PIPE CONNECTION G 3/4" L=mm.1500