



TECHNICAL SPECIFICATIONS

- Voltage: **400 V3N ~ 50 Hz**
- Total power : **6,75 Kw**
- Amperage: **10 A**
- Power cord supply size : **5 x 2,5 mmq**

GENERAL DETAILS

- Rack dimensions: **50x50 cm**
- Net weight : 107 Kg
- No.2 washing cycles: 90"-120"
- Possibility of automatic start of washing cycle by closing the hood
- Upper and lower rotating wash/rinse arms with stainless steel tube
- Wash pump:0.75 kW
- Boiler capacity: 8 lt
- Tank capacity: 30 lt
- Boiler heating elements: 6,0 kW
- Tank heating elements: 2.8 kW
- Water quantity per cycle: 2.8 lt
- Electromechanical control panel
- Tank and boiler thermometers
- Useful washing height: 420 mm
- Magnetic hood microswitch
- Automatic filling of water
- Rinse-aid dispenser
- Hot rinse
- Thermostop-controlled rinse operating temperature
- Anti-Backflow system on the hydraulic circuit included

WATER FILTRATION

- Pre-filtering of tank water by means of no. 1 stainless steel filters
- Single wash pump filter, easily removable

BODY

- AISI 304 stainless steel body
- Deep drawn tank with rounded edges
- Single skin hood
- Hood opening system with springs
- Removable upper and lower wash/rinse arms for easy cleaning
- Boiler in AISI 304 stainless steel

EQUIPMENT

- 2 racks 50x50 cm, 12/18 plates
- 1 glass rack 50x50 cm
- 2 cutlery baskets
- 1 inlet hose (1,5 mt lenght)
- 1 drain hose (2 mt lenght)

OPTIONALS


- Break Tank incorporated according to EN 1717 (mod. AH 800M BTI)
- Drain pump
- Adjustable detergent dispenser
- Adjustable rinse-aid dispenser
- 60 Hz
- WRAS
- Atmospheric boiler
- Warm water feeding > 45 °C

ACCESSORIES FOR WATER TREATMENT

- Water softener unit – stand alone

ACCESSORIES

- Stainless steel pre-wash tables/exit tables
- Racks 55x55 cm and special types

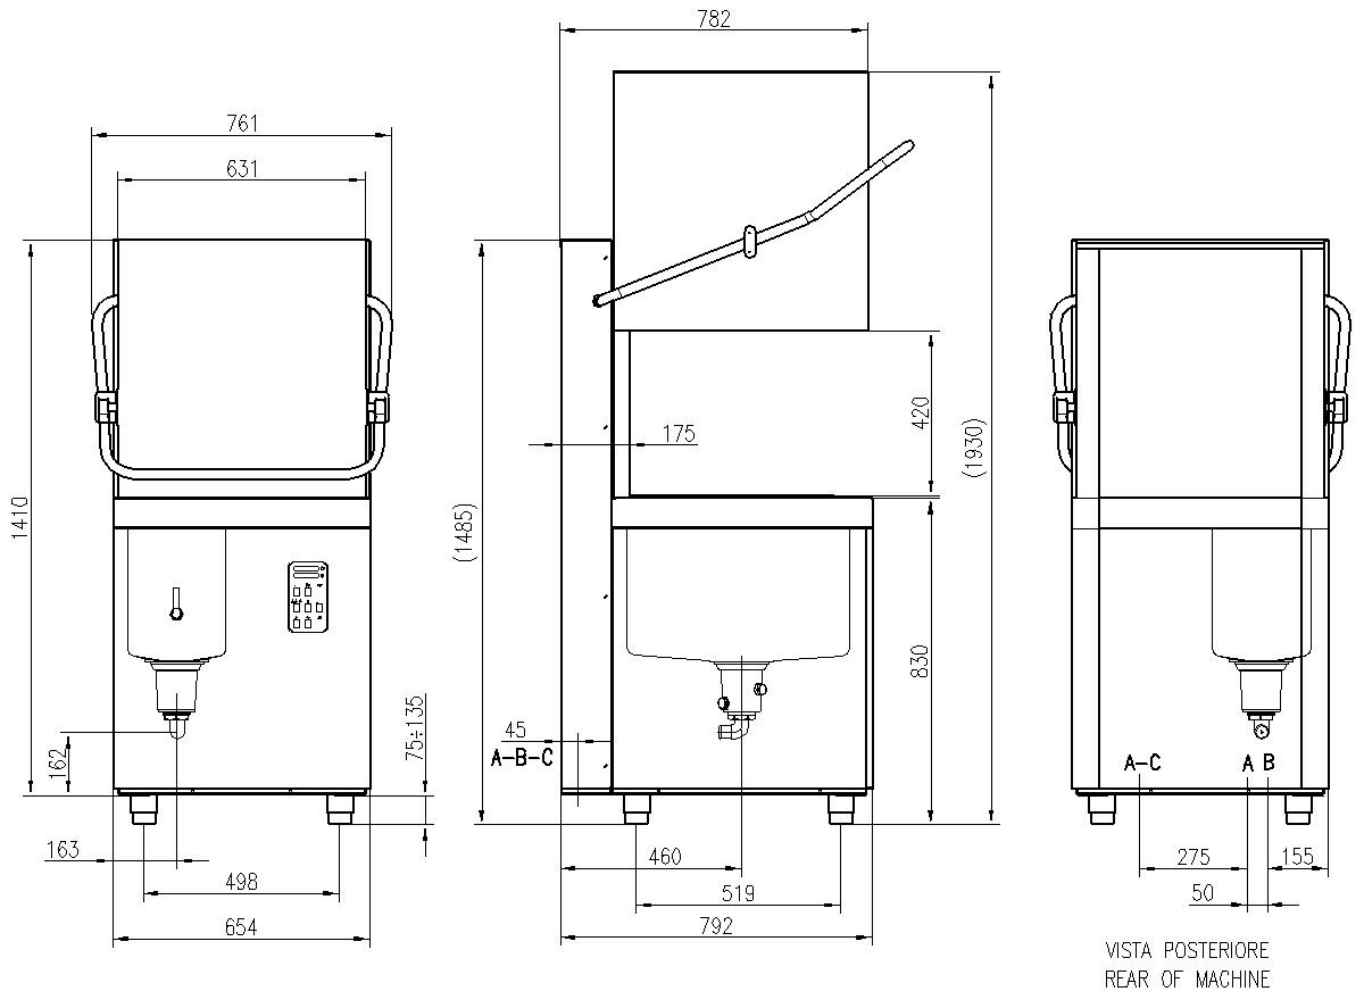

A: USCITA CAVO DI ALIMENTAZIONE
EXIT POWER CORD SUPPLY

B: TUBO DI SCARICO Ø INT. mm.28 LUNGHEZZA mm.2000
EXIT WATER OUTLET PIPE INT. Ø 28 mm. L=mm.2000.

C: CANNA DI CARICO CON ATTACCO G 3/4" LUNGHEZZA mm.1500.
WATER INLET PIPE CONNECTION G 3/4" L=mm 1500.

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided

WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 45°C