

Catering

Depth 815 mm

Cabinet Master 700 lt 0°+10°C 1 glass door

Model: **A70/1NV**

Code: **A140701006**

Exterior/interior finishing:

- Stainless steel AISI 304 18/10
- Back in galvanised steel

Insulation:

- 75 mm thickness - CFC/HCFC free

Cover evaporator:

- Removable in stainless steel AISI 304 Cr-Ni 18/10

Internal racks and slides:

- Stainless steel AISI 304 18/10

Inner corners:

- Rounded cornes ensuring maximum hygiene

Feet:

- Stainless steel AISI 304 adjustable 100-150 mm

Glass door:

- Self-closing, reversible with 105° dwell

Door handle:


- In PVC

Door gasket:

- Magnetic, easy to replace





Constructional data





• Dimensions	740×815×2085 mm
• Packing dimensions	760×850×2250 mm
• Net weight	145 Kg
• Gross capacity	700 lt
• Temperature range	0°+10°C
• Cooling capacity	519 W*
• Standard connection	230 V - 50 Hz
• Total rate	486 W - 2,6 A
• Cooling gas	R404a
• Standard equipment	N. 3 plastic coated shelves - GN2/1
	Key lock
	Lighting
• *Evap. -10°C cond. 54,4°C	


Features


 Plastic coated shelf GN 650×530 mm
Code O221650530


 Pair of slides type C - 605 mm
Code O121160520

 Stainless steel coat for shelf 00 w/supports for bottles
Code O261650530

 Stainless steel drawer for cabinet Master 700-H150 mm
Code L313007304

 Kit of racks for drawers (cabinets)
Code D615288004

 Graphic temperature recorder -10°+40°C
Code O841100020

 Kit of 4 swivel and brake castors in stainless steel AISI 304
Code O444000020

Accessories



Catering

Depth 815 mm

Cabinet Master 700 lt 0°+10°C 1 glass door

Coldline made major investments in design research, becoming a leader in technology and innovation. Each cabinet marked with the FSSsymbol is equipped with a refrigeration system independent of the structure, which provides improved flexibility and service.



FSS • FAST SERVICE SYSTEM

- You can change the intended use of an appliance, a freezer into a chiller - and the other way around - even after years of installation.
- You can extend the life of a refrigeration cabinet by replacing its old refrigeration system with a new one.
- Maintenance and service are simple, quick and do not require specialised personnel.

FSS • Fast Service System

NO-COMPROMISE QUALITY STEEL

AISI 304

AISI 304 18/10 is a high quality steel. Its stability guarantees good-looking and durable products, ensuring maximum hygiene and corrosion resistance over time.

75 mm

INSULATION THICKNESS

The 75 mm thick insulation ensures lower heat loss, reduced work of the compressor, therefore lower energy consumption.

INTELLIGENT DEFROST



Intelligent defrost changes according to the actual presence of frost. The system runs for the minimum time required.

EVAPORATION SYSTEM



The automatic evaporation of condensing water is activated only in the presence of water produced as a result of a defrost cycle.

CONSTANT TEMPERATURE



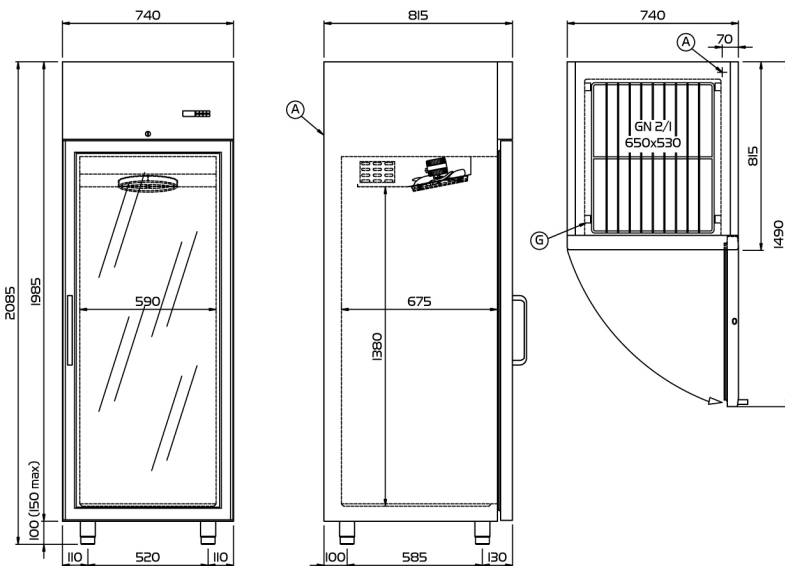
The fans stop when the door is opened to reduce temperature changes and consequently reduce the work of the compressor.

ASPERA COMPRESSORS



Aspera compressors reduce energy consumption by 15% and acoustic impact by 5 dBA.

Focus



(A) POWER SUPPLY CABLE OUTLET


(G) RACKS PITCH



Technical drawing



• Trade mark:	Coldline
• Model:	A70/1NV
• Design:	Upright cabinet
• Energy efficiency class :	F
• Energy efficiency index :	91,0
• Net volume positive/negative:	435 -
• Climate class:	4 (30°C-55% r.h.)
• Energy consumption over 24 hours (E24h):	3,30
• Annual energy consumption in kWh:	1205
• Cooling gas:	R404a




ENERG


енергия · ενεργεια

Y
IJA

IE
IA



A70/1NV




ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ

ENERGIJA · ENERGY · ENERGIE

ENERGI


1205

kWh/annum




435

L



-

L



4

30°C-55%

2015/1094-I

Energy label (UE 2015/1094)

