

NAU Maxi 2 Door Digital Refrigerator, 1430lt (-2 +10)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



NAU Maxi

2 Door Digital Refrigerator, 1430lt (-2 +10)

727282 (REX142FR)

2-door refrigerator
1430lt, -2+10°C, digital, AISI
304

727424 (REX142FR60)

2-door refrigerator
1430lt, -2+10°C, digital, AISI
304

Main Features

- Two full doors.
- Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption.
- Cleaning-free condenser: the structure of the wire frame condenser prevents dust and grease accumulation thus avoiding periodical cleaning operations and reducing energy consumption.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Rilsan coated grids for improved protection.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Tropicalized unit (43°C ambient temperature). (only for 727282)
- This appliance is intended for use in ambient temperatures up to 40°C. (only for 727282)

Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Interior base with corners, pressed from a single sheet.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Easy access to the main components for maintenance.
- Lockable door.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- Refrigerant type: R134a.
- CFC and HCFC-free insulation.
- Doors are self-closing and can be fully opened up to 180°.
- Mounted on adjustable Stainless steel feet, with castors as an option.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.

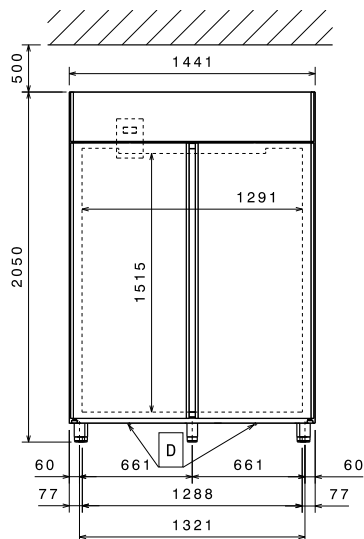
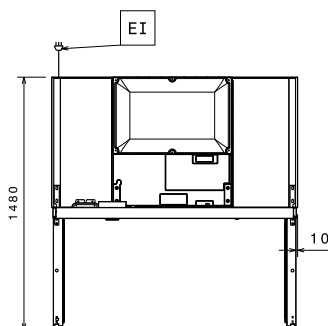
APPROVAL: _____

Included Accessories

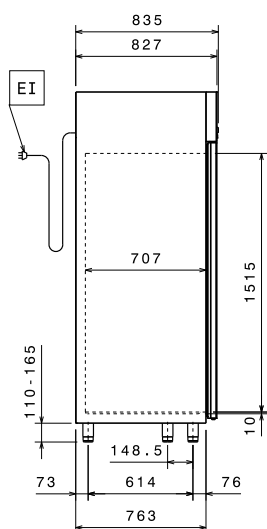
- 6 of 2/1GN grey rilsan grid with 2 runners PNC 881020

Optional Accessories

- 2 stainless steel runners for refrigerated cabinets (Marine) PNC 880242 ☐
- Set of 8 GN1/1 PVC containers for fish (only for 727282) PNC 880243 ☐
- Spacer for 670 lt and 1430 lt refrigerated cabinets PNC 880248 ☐
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252 ☐
- Kit to fit pastry trays (400x600mm) PNC 880333 ☐
- Kit of 6 swivelling wheels, 2 with brake, diam 50 mm PNC 880340 ☐
- 1/1GN plastic container with false bottom PNC 880705 ☐
- 4 swivelling wheels (2 with brake) for refrigerators, diam 125 mm, NOT for Glass Door and remote models PNC 881002 ☐
- 2/1GN grey rilsan grid PNC 881004 ☐
- 2/1GN aisi 304 stainless steel grid PNC 881016 ☐
- 2/1GN 304 AISI stainless steel grid with 2 runners PNC 881018 ☐
- Meat rail for 670/1430lt refrigerators with 4 hooks PNC 881019 ☐
- 2/1GN grey rilsan grid with 2 runners PNC 881020 ☐
- Set of 2 stainless steel runners for 670/1430lt refrigerators and freezers PNC 881021 ☐
- Pedal opening for 1430lt refrigerator PNC 881033 ☐
- 2/1GN pvc container with lid and 2 runners PNC 881039 ☐
- 2/1GN perforated shelf PNC 881042 ☐
- 1/1GN rilsan steel wire basket h=150mm PNC 881043 ☐
- 3 grey rilsan central grids for 1430lt (not for glass door) PNC 881044 ☐
- 2/1GN grey rilsan basket+2 runners h=150mm PNC 881047 ☐
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457 ☐

Front

Top


EI = Electrical connection
RI = Refrigerant Inlet
RO = Refrigerant Outlet

Side


Electric

Supply voltage:

727282 (REX142FR)	230 V/1 ph/50 Hz
727424 (REX142FR60)	220 V/1 ph/60 Hz

Electrical power:

727282 (REX142FR)	0.33 kW
727424 (REX142FR60)	0.318 kW

Key Information:

Gross capacity:	1430 lt
Net Volume:	
727282 (REX142FR)	1005 lt
727424 (REX142FR60)	1025 lt
Door hinges:	1 Left+1 Right
External dimensions, Height:	2050 mm
External dimensions, Width:	1441 mm
External dimensions, Depth:	837 mm
External dimensions, Depth with Doors Open:	1430 mm
Number and type of doors:	2 Full
Number and type of grids (included):	6 - GN 2/1
Type of external material:	304 AISI
Type of internal material:	304 AISI
Internal panels material:	304 AISI
Number of positions & pitch:	
727282 (REX142FR)	44; 30 mm
727424 (REX142FR60)	44; 33 mm

Refrigeration Data

Control type:	Digital
Refrigerant type:	R134a
Refrigeration power:	
727282 (REX142FR)	398 W
727424 (REX142FR60)	417 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	170 g
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated

Product Information (EU Regulation 2015/1094)

Energy Class:

727282 (REX142FR)	D
727424 (REX142FR60)	0

Yearly energy consumption:

727282 (REX142FR)	1643kWh/year
-------------------	--------------

Climate class:

727282 (REX142FR)	Heavy Duty (5)
-------------------	----------------

Energy Efficiency Index (EEI):

727282 (REX142FR)	72,69
727424 (REX142FR60)	0