

PT3 Line 3 Door Freezer Counter, 440lt (-22/-15) - Upstand

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



PT3 Line

3 Door Freezer Counter, 440lt (-22/-15) - Upstand

113181 (TRFA183A)

3-door freezer table, -22-13°C

Short Form Specification

Item No.

Internal and external doors, front and side panels in 304 AISI stainless steel. No worktop. N.8x1/2 drawers. Built-in refrigeration unit. Ventilated. Refrigerant R404a. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Digital control panel. Evaporator in aluminium. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2+10°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height. Pre-arranged for drain pipe.

Main Features

- Adjustable temperature range from -15 °C to -22 °C to suit meat, fish and dairy storage requirements.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Raised rear upstand permits unit to be connected up against the wall for better hygiene.
- 60 mm insulation for energy saving.
- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- Anti-tilt runners accept GN 1/1 containers.
- Tropicalized unit (43°C ambient temperature).
- This appliance is intended for use in ambient temperatures up to 40°C.

Construction

- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel legs to give 150 mm clearance for ease of cleaning the floor.
- Worktop in AISI 304 Stainless steel with a 50 mm thickness.
- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Built-in compressor to suit operating conditions.

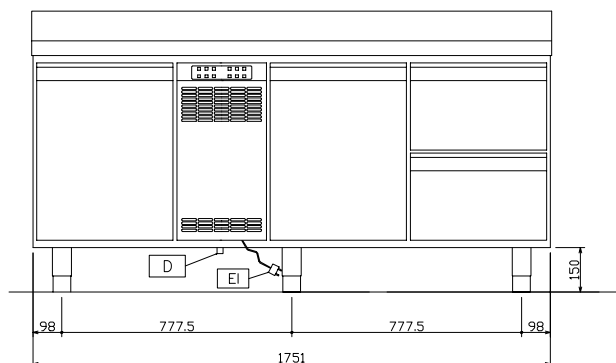
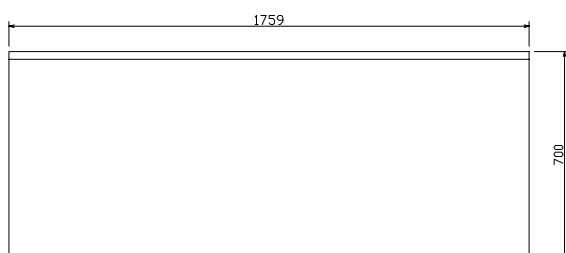
Included Accessories

- 3 of 1/1 GN grey "rilsan" grid PNC 881435

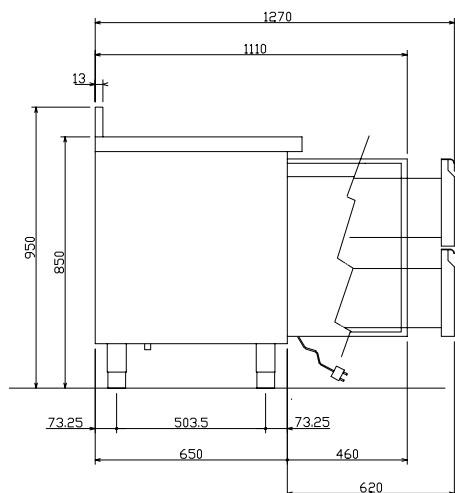
Optional Accessories

- 1/1 GN plastic container h. 100 mm, 14 lt capacity PNC 811451 ☐
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252 ☐
- 2 wheels (one with brake) PNC 880539 ☐
- 1/1 GN plastic container h. 65 mm PNC 881038 ☐
- 1/1 GN plastic container h. 150 mm PNC 881040 ☐
- 1/1 GN grey "rilsan" grid PNC 881435 ☐
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457 ☐
- Kit lock for refrigerated counter PNC 881499 ☐
- Kit 1 door with internal rack for refrigerated counter PNC 881508 ☐

APPROVAL: _____

Front

Top


D = Drain
 EI = Electrical connection

Side

Electric

Supply voltage:
 113181 (TRFA183A) 230 V/1N ph/50 Hz
 Electrical power: 0.82 kW

Key Information:

Gross capacity: 440 lt
 Net Volume: 235 lt
 N° of doors: 3
 Door hinges: 1 Left+2 Right
 External dimensions, Height: 950 mm
 External dimensions, Width: 1759 mm
 External dimensions, Depth: 700 mm
 Depth with doors open: 1110 mm
 Height adjustment: -10/50 mm
 Number and type of grids (included): 3 - GN 1/1
 Built-in Compressor and Refrigeration Unit

Refrigeration Data

Control type: Digital
 Compressor power: 1 hp
 Refrigerant type: R404a
 Refrigeration power: 935 W
 Refrigeration power at evaporation temperature: -31 °C
 Refrigerant weight: 280 g
 Operating temperature min.: -22 °C
 Operating temperature max.: -15 °C
 Operating mode: Ventilated

Product Information (EU Regulation 2015/1094)

Energy Class: g
 Yearly energy consumption: 4067kWh/year
 Climate class: Heavy Duty (5)
 Energy Efficiency Index (EEL): 108,38