

PT3 Line
2 Door Refrigerated Counter,
290lt (-2/+10) - Upstand

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



PT3 Line

2 Door Refrigerated Counter, 290lt
(-2/+10) - Upstand

113153 (TRNA132A)

2-door refrigerated
table, -2/+10°C

Short Form Specification

Item No. _____

Internal and external doors, front and side panels and removable worktop (50mm thick) in 304 AISI stainless steel. External back panel in galvanized steel. Reversible self-closing doors in positions less than 90°, a stop at 95° and maximum opening at 180° with a door seal guaranteeing a perfect closure. Height adjustable legs from -10/+50 in 304 AISI stainless steel. Insulation guaranteed by cyclopentane insulating foam (50mm thick). Digital control panel. Operating temperature -15/-20°C. Automatic defrosting and evaporation of defrosted water using a hot gas. Built-in refrigeration unit to operate in ambient temperatures up to +38°C. Ventilated. R404a gas in refrigeration circuit. CFC and HCFC free. Supplied with n° 3 Rilsan coated grids 1/1GN.

Main Features

- 60 mm insulation for energy saving.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Raised rear upstand permits unit to be connected up against the wall for better hygiene.
- Anti-tilt runners accept GN 1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Tropicalized unit (43°C ambient temperature).
- This appliance is intended for use in ambient temperatures up to 40°C.

Construction

- Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Rounded internal corners for ease of cleaning.
- Worktop in AISI 304 Stainless steel with a 50 mm thickness.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Mounted on Stainless steel legs to give 150 mm clearance for ease of cleaning the floor.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).


Included Accessories

- 2 of 1/1 GN grey "rilsan" grid PNC 881435

Optional Accessories

- 1/1 GN plastic container h. 100 mm, 14 lt capacity PNC 811451
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 2 wheels (one with brake) PNC 880539
- 1/1 GN plastic container h. 65 mm PNC 881038
- 1/1 GN plastic container h. 150 mm PNC 881040
- 1/1 GN grey "rilsan" grid PNC 881435
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457
- Kit lock for refrigerated counter PNC 881499
- Kit 2 drawers and rack for refrigerated table - not for freezer version PNC 881505
- Kit 3 drawers and rack for refrigerated table - not for freezer version PNC 881506
- Kit 1 door with internal rack for refrigerated counter PNC 881508

APPROVAL: _____

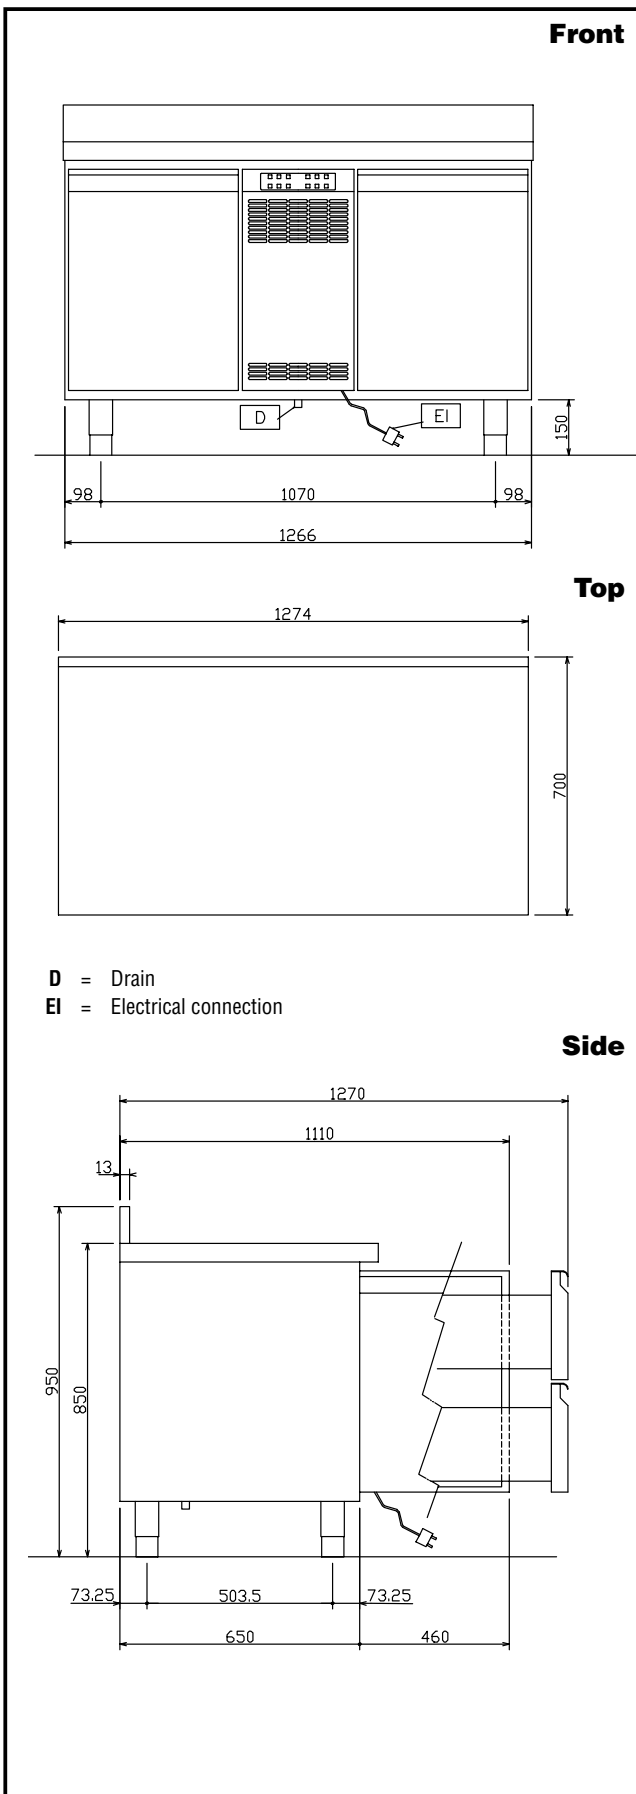

Electric

Supply voltage:	113153 (TRNA132A)	230 V/1N ph/50 Hz
Electrical power:		0.34 kW

Key Information:

Gross capacity:	291 lt
Net Volume:	157 lt
N° of doors:	2
Door hinges:	1 Left+1 Right
External dimensions, Height:	950 mm
External dimensions, Width:	1274 mm
External dimensions, Depth:	700 mm
Depth with doors open:	1110 mm
Height adjustment:	-10/50 mm
Number and type of grids (included):	2 - GN 1/1
Built-in Compressor and Refrigeration Unit	

Refrigeration Data

Control type:	Digital
Compressor power:	1/4 hp
Refrigerant type:	R134a
Refrigeration power:	358 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	220 g
Min/Max internal humidity:	80/95/
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
Defrost type:	Automatic

Product Information (EU Regulation 2015/1094)

Energy Class:	C
Yearly energy consumption:	1000kWh/year
Climate class:	Heavy Duty (5)
Energy Efficiency Index (EEI):	45,63