

## PT3 Line 3 Door Refrigerated Counter, 440lt (-2/+10) - Upstand

ITEM # \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 NAME # \_\_\_\_\_  
 SIS # \_\_\_\_\_  
 AIA # \_\_\_\_\_



### PT3 Line

### 3 Door Refrigerated Counter, 440lt (-2/+10) - Upstand

113163 (TRNA183A)

3-door refrigerated  
table, -2/+10°C

### Short Form Specification

#### Item No.

Internal and external doors, front and side panels and worktop in 304 AISI stainless steel. Worktop with splashback. N.6x1/2 drawers. Built-in refrigeration unit. Ventilated. Refrigerant R404a. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2/+10°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height.

### Main Features

- 60 mm insulation for energy saving.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Electronic microprocessor control with external digital temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Raised rear upstand permits unit to be connected up against the wall for better hygiene.
- Anti-tilt runners accept GN 1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Tropicalized unit (43°C ambient temperature).
- This appliance is intended for use in ambient temperatures up to 40°C.

### Construction

- Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Rounded internal corners for ease of cleaning.
- Worktop in AISI 304 Stainless steel with a 50 mm thickness.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Mounted on Stainless steel legs to give 150 mm clearance for ease of cleaning the floor.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

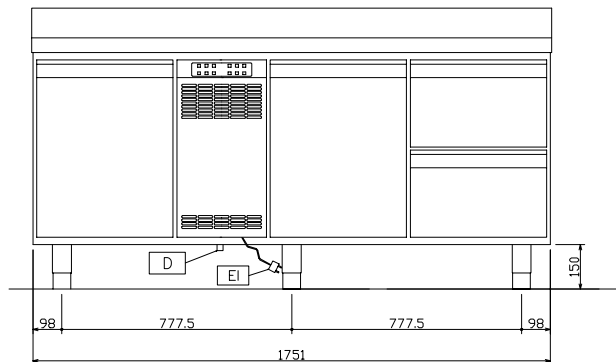
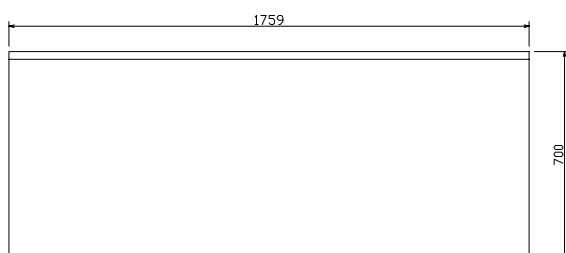
### Included Accessories

- 3 of 1/1 GN grey "rilsan" grid PNC 881435

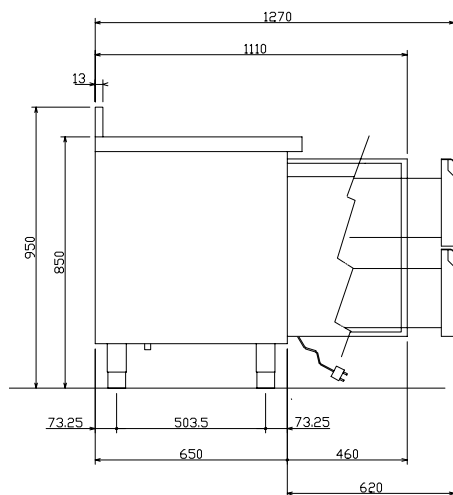
### Optional Accessories

- 1/1 GN plastic container h. 100 mm, 14 lt capacity PNC 811451 ☐
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252 ☐
- 2 wheels (one with brake) PNC 880539 ☐
- 1/1 GN plastic container h. 65 mm PNC 881038 ☐
- 1/1 GN plastic container h. 150 mm PNC 881040 ☐
- 1/1 GN grey "rilsan" grid PNC 881435 ☐
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457 ☐
- Kit lock for refrigerated counter PNC 881499 ☐
- Kit 2 drawers and rack for refrigerated table - not for freezer version PNC 881505 ☐
- Kit 3 drawers and rack for refrigerated table - not for freezer version PNC 881506 ☐
- Kit 1 door with internal rack for refrigerated counter PNC 881508 ☐

APPROVAL: \_\_\_\_\_

**Front**

**Top**


D = Drain  
 EI = Electrical connection

**Side**

**Electric**

Supply voltage:  
 113163 (TRNA183A) 230 V/1N ph/50 Hz  
 Electrical power: 0.34 kW

**Key Information:**

Gross capacity: 440 lt  
 Net Volume: 235 lt  
 N° of doors: 3  
 Door hinges: 1 Left+2 Right  
 External dimensions, Height: 950 mm  
 External dimensions, Width: 1759 mm  
 External dimensions, Depth: 700 mm  
 Depth with doors open: 1110 mm  
 Height adjustment: -10/50 mm  
 Number and type of grids (included): 3 - GN 1/1  
 Built-in Compressor and Refrigeration Unit

**Refrigeration Data**

Control type: Digital  
 Compressor power: 1/4 hp  
 Refrigerant type: R134a  
 Refrigeration power: 358 W  
 Refrigeration power at evaporation temperature: -10 °C  
 Refrigerant weight: 220 g  
 Min/Max internal humidity: 80/95/  
 Operating temperature min.: -2 °C  
 Operating temperature max.: 10 °C  
 Operating mode: Ventilated

**Product Information (EU Regulation 2015/1094)**

Energy Class: C  
 Yearly energy consumption: 1081 kWh/year  
 Climate class: Heavy Duty (5)  
 Energy Efficiency Index (EEI): 45,22