

Pizza ovens
1-deck Digital Electric Oven, 6
Pizzas (35cm)-wide

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Pizza ovens

1-deck Digital Electric Oven, 6 Pizzas
(35cm)-wide

291079 (PODE16C)

1-deck digital electric oven for
6 pizzas (diam. 35 cm), wide
opening

Short Form Specification

Item No. _____

Front in stainless steel. Increased visibility thanks to the large and highly resistant borosilicate glass in the oven door. Chamber in stainless steel. Cooking surface in refractory material of cordierite (20mm thick) suitable for direct cooking or with trays. Arched cooking chamber guarantees an even cooking temperature and reduces the emission of wasted heat. 12 cm thick rock wool insulation guarantees minimal heat dispersion from the oven. Internal light protected by a borosilicate glass cover which can be easily removed for replacement. Heating via armoured stainless steel elements on the top and bottom of the chamber. Heat recovery system. Vapor release vent. The control panel is not attached to the oven thus protecting the electrical components. Digitally controlled temperature. Safety thermostat. Stand and hood available as accessories.

Main Features

- Heat recovery system, which ensures a high level of cooking uniformity by limiting the heating waste during the baking cycle and allows a quick heating recovery after the loading operation.
- Special 12 cm-thick rock wool insulation, which guarantees minimal energy consumption and reduction of heat dispersion from the oven, thus limiting rise in temperature of the working environment.
- The special construction assures maximum baking uniformity. This allows to obtain a better quality pizza, eliminating the user's need for rotating the pizza, and consequently reducing the working times.
- Separate power control for top and bottom heating elements for cooking flexibility.
- Buzzer for end of cooking.
- Delayed start with countdown switching on system.
- Control panel completely separate from the cooking chamber, in order to ensure the correct functionality of the electric components and to ease any maintenance operations.
- CE marked.

Construction


- Cooking chamber constructed in stainless steel. Cooking surface made of cordierite refractory material, which allow backing directly on the surface, as well as in trays.
- Adjustable vapor release vent.
- Heatproof internal lighting protected by a stock-resistant covering (12V), easy to remove for replacement.
- Large-sized door in 430 AISI stainless steel, fitted with a highly resistant borosilicate glass front to increase visibility.

Optional Accessories


- Hood for 6 and 6x2-pizza (diam. 35 cm) digital electric oven, wide opening PNC 291095
- Stand for 6-pizza (diam. 35 cm) digital electric oven, wide opening PNC 291116

APPROVAL: _____

Front

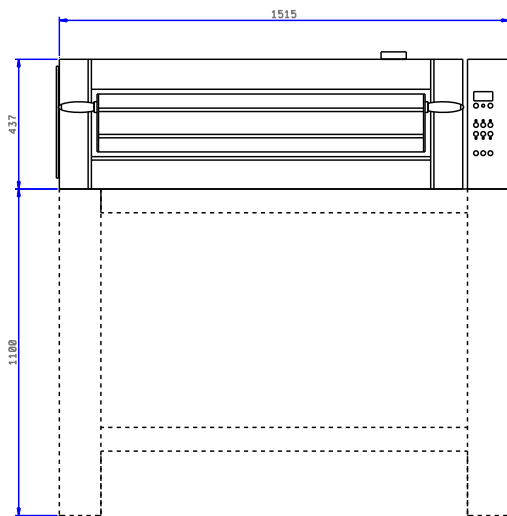


Top

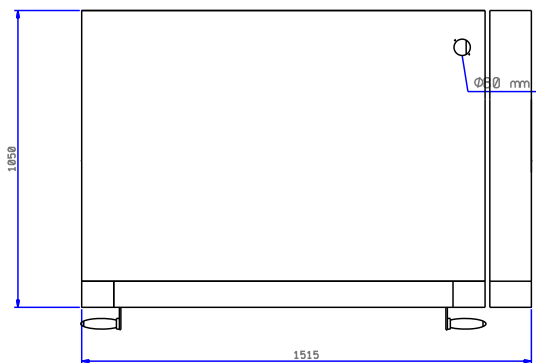

EI = Electrical connection

Side

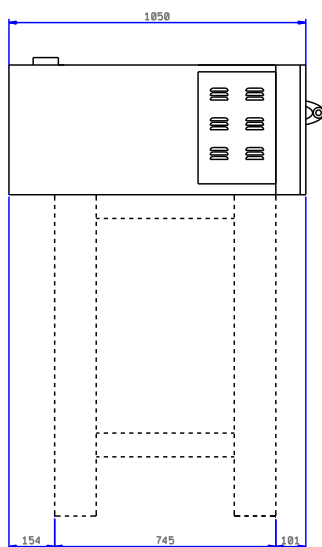

Electric

Supply voltage:
291079 (PODE16C) 400 V/3N ph/50/60 Hz
Electrical power: 7.9 kW

Key Information:

External dimensions, Height: 437 mm
External dimensions, Width: 1515 mm
External dimensions, Depth: 1050 mm
Net weight: 145 kg
Shipping weight: 185 kg
Shipping height: 620 mm
Shipping width: 1560 mm
Shipping depth: 1200 mm
Cooking cycles - air-convection: 400 °C
Internal dimensions, width: 1080 mm
Internal dimensions, depth: 720 mm
Internal dimensions, height: 150 mm