

## Modular Cooking Range Line EVO900 Full Module Electric Grill

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



### Modular Cooking Range Line

### EVO900 Full Module Electric Grill

392271 (Z9GREHGCPU)

Electric grill, full module - free standing

### Short Form Specification

#### Item No. \_\_\_\_\_

Heating via incoloy armoured heating elements positioned under the cooking grid. Cooking surface grids in cast iron, easily removable for cleaning. Cast iron grids can be rotated for the grilling of fish or meats. Includes drip tray for the collection of grease and fat. Exterior panels of unit in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Incoloy armoured heating elements positioned under the cooking grid.
- Each bank of elements has a temperature controlled thermostat.
- Power indicator light.
- Cast iron grids can be rotated on the right ribbed profile, to grill fish or meats.
- Drip tray to collect residual cooking juices and fat.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwasher-safe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Energy regulation through a control knob.
- Heating element can be tilted frontally for easy cleaning.
- Monoblock structure gives better stability and easier installation.
- The cooking surface is double-sided: one for meat and the other for fish and vegetables.
- The drawer can be filled with water to obtain vapor to cook softer food and to facilitate the cleaning of the drawer.
- The low temperature of the external panels allow to work in safety.

### Construction


- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit is 900mm deep to give a larger working surface area.

APPROVAL: \_\_\_\_\_


## Optional Accessories

- Junction sealing kit PNC 206086 ☐
- 4 wheels, 2 swivelling with brake PNC 206135 ☐  
 (EVO700/900). It is mandatory to install with  
 base supports for feet/wheels.
- Flanged feet kit PNC 206136 ☐
- Frontal kicking strip for concrete installation, PNC 206148 ☐  
 800 mm
- Frontal kicking strip for concrete installation, PNC 206150 ☐  
 1000 mm
- Frontal kicking strip for concrete installation, PNC 206151 ☐  
 1200 mm
- Frontal kicking strip for concrete installation, PNC 206152 ☐  
 1600 mm
- Pair of side kicking strips (concrete installation) PNC 206157 ☐
  
- Kit 4 feet for concrete installation (for free PNC 206163 ☐  
 standing grills only)
- Side handrail for right/left hand PNC 206165 ☐
- Frontal handrail 400 mm PNC 206166 ☐
- Frontal handrail 800 mm PNC 206167 ☐
- Frontal kicking strip, 800 mm PNC 206176 ☐
- Frontal kicking strip, 1000 mm PNC 206177 ☐
- Frontal kicking strip, 1200 mm PNC 206178 ☐
- Frontal kicking strip, 1600 mm PNC 206179 ☐
- Pair of side kicking strips PNC 206180 ☐
- 2 panels for service duct (single installation) PNC 206181 ☐
- Large handrail (portioning shelf) 400 mm PNC 206185 ☐
- Large handrail (portioning shelf) 800 mm PNC 206186 ☐
- Frontal handrail 1200 mm PNC 206191 ☐
- Frontal handrail 1600 mm PNC 206192 ☐
- Frontal panel for 800 mm free standing grill PNC 206198 ☐
- 2 panels for service duct (back to back PNC 206202 ☐  
 installation)
- 2 side panels for free standing grill PNC 206207 ☐
- Water filling tap for 800 mm free standing grills PNC 206281 ☐
- Water column with swivel arm (water column PNC 206289 ☐  
 extension not included)
- Chimney upstand, 800 mm PNC 206304 ☐
- 2 side covering panels, height 700 mm, depth PNC 206335 ☐  
 900 mm
- Base support for feet or wheels - 800mm PNC 206367 ☐  
 (EVO700/900)
- Stainless steel grid for free standing grills PNC 206404 ☐  
 (EVO900)
- Stainless steel grid with drainage channels for PNC 206405 ☐  
 free standing V-shaped grills (EVO900)
- Scraper for grids with drainage channels - top PNC 206421 ☐  
 grills
- Scraper for cast iron grills PNC 206422 ☐

### Front

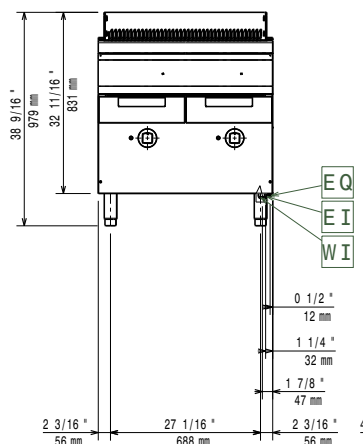


### Top



EI = Electrical connection  
 EQ = Equipotential screw  
 F = Fumes outlet

### Side

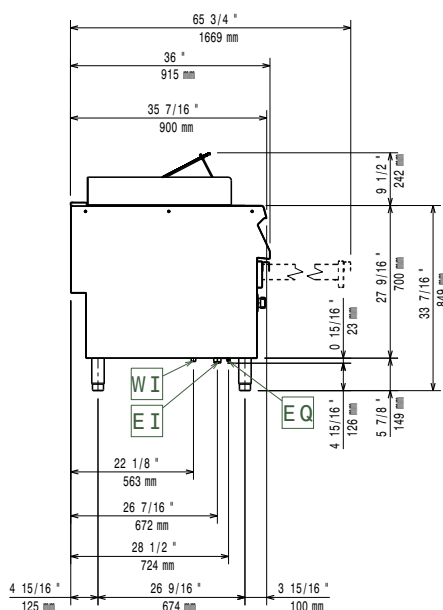

### Electric

#### Supply voltage:

392271 (Z9GREHGCFU) 400 V/3N ph/50/60 Hz

#### Electrical power:

15 kW

#### Total Watts:

15 kW

### Key Information:

Cooking surface width: 631 mm

Cooking surface depth: 640 mm

External dimensions, Height: 850 mm

External dimensions, Width: 800 mm

External dimensions, Depth: 900 mm

Net weight: 94 kg

Shipping weight: 114 kg

Shipping height: 1180 mm

Shipping width: 1020 mm

Shipping depth: 860 mm

Shipping volume: 1.04 m<sup>3</sup>

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.